




Internal Door Phone Monitor

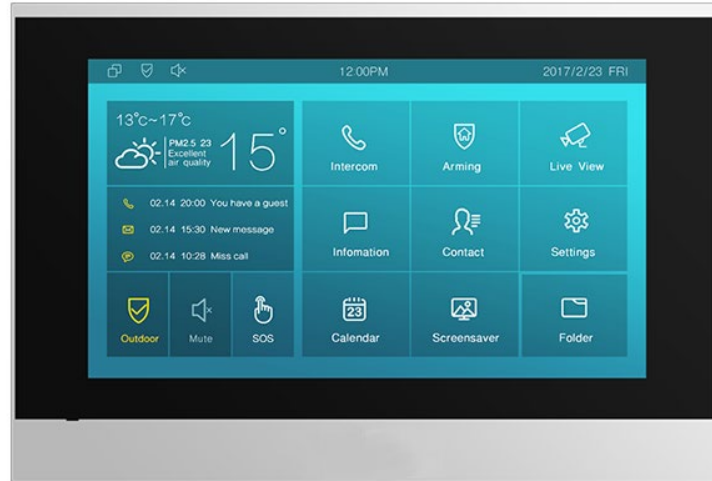

Overview:

The Akuvox C315S Premium touch screen provides Audio and Video communication with all Akuvox IP Door Phones via SIP 2.0 protocol.

Delivering the ultimate touch screen experience in an unobtrusive, space saving design featuring a 7" capacitive touch screen display.

The C315S has an ultra-clear and stylish appearance incorporating a thin profile and small footprint. Perfect for installation in office spaces or in private residential building spaces.

The Ability to have 2-Way communication with other internal monitors in a network is seamless based on the SIP v2.0 protocol. The C315S is powered by PoE (Power over Ethernet) allowing for simple installation.





Internal Door Phone Monitor

C315S Internal Door Phone Monitor:

✓ IP AUDIO & VIDEO

The C315S provides audio and visual communication with all of Akuvox's IP door phones.

✓ 7" TOUCHSCREEN

The C315S is an elegant 7" touch screen. The 7" display can present information and user navigation option customizable for you business or residential building.

✓ POE IEEE802.3AF, POWER-OVER-ETHERNET

The Akuvox Range of products are all POE (Power over Ethernet) devices or 12 Volt power supply. POE Switches Sold Separately**

✓ HD Quality Video

The C315S Receives HD Quality video when receiving IP calls from the Akuvox door phones.



Additional Features:

Video:

- Streaming Formats: H.264
- Resolution: up to 1080p

Interface:

- Ethernet: 2 x 10/100 Mbps ports, auto-switching, auto-discovery, auto-negotiating, full/half duplex, DHCP, IEEE802.3af compliant
- Relay Out: 1 x relay out (NO/COM/NC)
- Bell in: 1 x Bell input terminal
- RS485: 1 x RS485 Communication port


POE Switches are not provided with any Akuvox device



Internal Door Phone Monitor

Technical Data

| | |
|----------------------------|--|
| Vanderbilt Material Number | N54524-Z100-A100 |
| Power | IEEE 802.3af Power-over-Ethernet |
| Input Voltage | 12V DC (when not using POE) |
| Operating Environment | Internal wall mounting |
| Humidity | 10% to 90% (Non Condensing) |
| Nett Weight | 0.443 inclusive of mounting bracket |
| Dimensions (H x W x D mm) | 200x132x17.5mm |
| Material: Body | ABS Plastic |
| Display | Active Matrix TFT |
| Display Size | 7"(176mm) |
| Aspect Ratio: | 16:9 |
| Resolution | 1024 x 600 |
| Illumination | Edge Lit LED |
| Colour Depth | 24-Bit, 16M Colours |
| Viewing angle | +/-70° Horizontal, +/-70° Vertical |
| Interface | RS485 x 1 Communication port |
| Memory Ram | 1GB |
| Memory Flash | 8GB |
| Languages Supported | English, Spanish, French, Dutch, German, Polish, Portuguese, Slovakian, Turkish, Chinese |

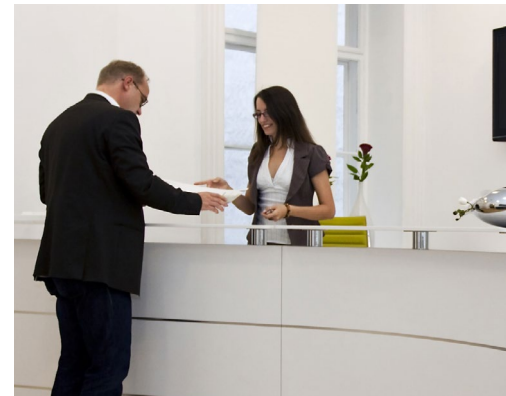



Internal Door Phone Monitor

Ordering Information:

| Type | Art. No. | Description | Weight* |
|-------|------------------|-----------------------------------|---------|
| C315S | N54524-Z100-A100 | C315S Internal Door Phone Monitor | 0.550kg |

Other Available Products

| Type | Art. No. | Description | Weight* |
|-------------------|------------------|--|---------|
| R20A | N54524-Z101-A100 | R20A Intercom with Video & Card Reader | 0.503kg |
| R27A | N54524-Z102-A100 | R27A Intercom w.Video,Card Reader&Keypad | 1.030kg |
| R27A MOUNTING KIT | N54524-Z105-A100 | R27A Mounting Kit- Surface Mount | 0.650KG |

* Gross weight of the product inclusive of the weight of its accessories and packaging.

an **ACRE**[™]
company

vanderbiltindustries.com


 @VanderbiltInd

 Vanderbilt Industries

Vanderbilt International Ltd.

Clonshaugh Business and Technology Park

Clonshaugh, Dublin D17 KV 84, Ireland

 +353 1 437 2560